PCT WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 5 :
H04R 19/00 — A1

(11) International Publication Number: WO 95/01079

(43) International Publication Date: 5 January 1995 (05.01.95)

(21) International Application Number: PCT/FI94/00278

(22) International Filing Date: 21 June 1994 (21.06.94)

(30) Priority Data:
932860 21 June 1993 (21.06.93) FI

(71)(72) Applicant and Inventor: KIRJAVAINEN, Kari [FI/FI]; Kivenlahdenkatu 11 A 4, FIN-02320 Espoo (FI).

(74) Agent: OY HEINÄNEN AB; Annankatu 31-33 C, FIN-00100 Helsinki (FI).

(81) Designated States: JP, US, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

Published
With international search report.

(54) Title: FOLDED DIELECTRIC FILM ELEMENT AND METHOD FOR MANUFACTURING THE SAME

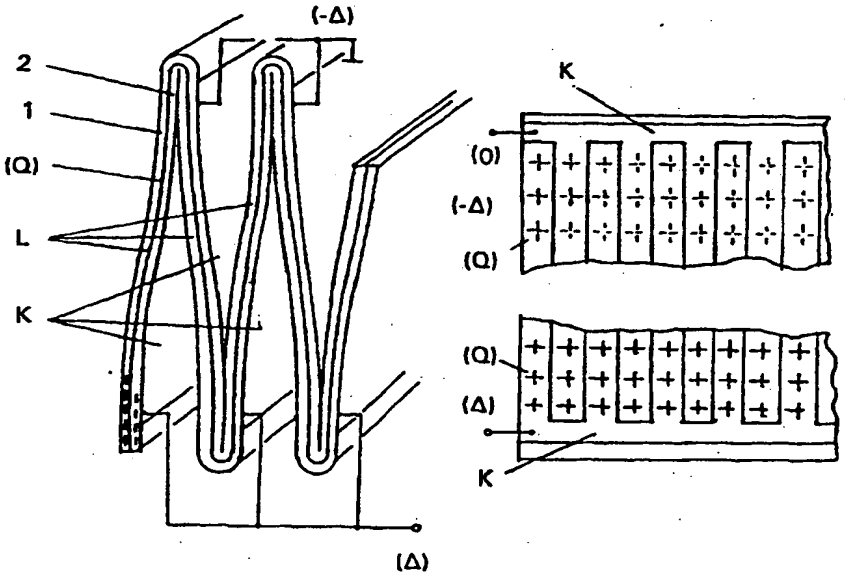

(57) Abstract

A folded dielectric film element functioning as an energy converter, consisting of a dielectric film (1, 2) bent into folds (L) and provided with electrodes (K). The electrodes (K) are so arranged in the folds (L), different electrodes being placed in successive folds, that the strength of the electric field increases in one fold and decreases in the other. The elements of the invention allow a high acoustic power to be achieved. In noise damping aplications, the elements function in a multi-effect manner and they also have a passive damping effect as the air flows between the folds.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgystan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo			SE	Sweden
CH	Switzerland	KR	Republic of Korea	SI	Slovenia
CI	Côte d'Ivoire	KZ	Kazakhstan	SK	Slovakia
CM	Cameroon	LI	Liechtenstein	SN	Senegal
CN	China	LK	Sri Lanka	TD	Chad
CS	Czechoslovakia	LU	Luxembourg	TG	Togo
CZ	Czech Republic	LV	Latvia	TJ	Tajikistan
DE	Germany	MC	Monaco	TT	Trinidad and Tobago
DK	Denmark	MD	Republic of Moldova	UA	Ukraine
ES	Spain	MG	Madagascar	US	United States of America
FI	Finland	ML	Mali	UZ	Uzbekistan
FR	France	MN	Mongolia	VN	Viet Nam
GA	Gabon				

FOLDED DIELECTRIC FILM ELEMENT AND METHOD FOR MANUFACTURING THE SAME.

The present invention relates to a folded dielectric film element acting as an energy converter as defined in claim 1 and to a procedure for manufacturing such a film element. This type of films can be used for the generation, measurement and damping of sound. Broadly speaking, the invention is concerned with the conversion of electric energy into mechanical energy or conversion of mechanical energy into electric energy. A film like this is presented e.g. in US patent specification 4 654 546.

To permit an electric field to be utilized in this type of energy converters, the air gaps used must be very small to achieve a sufficient field strength. However, this means that the play of the converter is reduced.

The object of the present invention is to produce a new solution for increasing the amount of air or medium replaced by the converter by using a folded dielectric film and placing the electrodes in the folds. The features characterizing the solution of the invention are presented in detail in the attached claims.

The solution of the invention makes it possible to utilize increased air motion amounts while simultaneously producing large air pressures, e.g. sound pressures in acoustic applications.

The invention also concerns a procedure for the manufacture of converter elements, in which a folded element is first compressed into a tight pack, causing the corners of the folds to be pressed into sharp edges. After this, by stretching the element, the folds assume their natural curvature, resembling a low-gradient letter S, which keeps the folds in a stable position when subject to the forces of the electric field.

Elements manufactured according to the invention allow a high acoustic power to be reached. In noise damping applications, the elements function in a multi-effect manner, damping the noise passively while the air is flowing in the gaps between the folds. The electric energy generated by the sound waves is converted into heat in the resistances of the electrodes. A measured signal corresponding to the sound pressure can be fed in opposite phase to another element. The two first-mentioned prinicples damp sound waves of any frequency coming from any direction, and in the case of low frequencies, also those incident at an oblique angle. The sound damping capacity of the element is 20 dB at best.

In the following, the invention is described by the aid of an example by referring to the attached drawings, in which

Fig. 1a and 1b present a folded dielectric film according to the invention, Fig. 2a and 2b another folded dielectric film according to the invention and Fig. 3a and 3b a third folded dielectric film according to the invention. Fig. 4a presents a variable-gain amplifier circuit and Fig. 4b a curved film. Fig. 5a - 5c illustrate a wall structure and its damping capacity, Fig. 6 and 7 present applications of circuits connected according to the invention and Fig. 8 an electret film with a metal plating on one side.

Fig. 1a presents an embodiment of the invention, showing a densely folded (folds L) dielectric film element consisting of two film layers 1,2 placed one upon the other. In Fig. 1, the electric field is alternately strengthened and weakened in successive folds L by means of a control voltage. In the folded element, the film, which is charged to charge Q, is coated in the successive folds with electrode layers K such that control electrodes of opposite sign are placed on opposite sides of the fold L. Such a film element can be manufactured e.g. from a permanently charged electret film or a three-layer film in which the middle layer consists of

semiconducting material and is connected to a d.c. potential (control signal Δ on one side of the layer K and control signal $-\Delta$ in opposite phase on the opposite side of the layer K) producing a charge Q. Fig. 1b illustrates the structure of the control electrodes K. Both consist of a rectangular edge and vertical bars starting from it and placed between the bars of the opposite electrode. Each fold L is joined at its ends with an adjacent fold L but is apart from adjacent folds at its middle portion. Such an element can be controlled using traditional amplifier equipment in sound reproduction applications.

Since the pressure which can be achieved by the electrostatic principle is

$$p = \tfrac{1}{2}\varepsilon E^2 = \tfrac{1}{2}\varepsilon(U/s)^2,$$

where ε is the dielectric constant, E is the strength of the electric field, U is the voltage and s is the distance between the electrodes, it is of essential importance for the achievement of a good linearity that the terms dependent on the distance remain as unchangeable as possible, as is the case in folds L designed according to the invention.

Sound reproduction devices employing the electrostatic principle generally use preforated stator plates and a thin movable electrode film between them. Since the force of the electric field affects the stator plates as well, undesirable resonances are generated in them. Moreover, the elements have to be large to produce a sufficient power.

The sound reproduction device presented in this invention consists of only one folded film structure with electrodes formed on it.

In another embodiment (Fig. 2a), the electrodes K are arranged by connecting to the sides of the folds L in successive order a positive potential, a positive control signal

Δ, a negative potential and a control signal -Δ in opposite phase. The electrodes K are connected by joining the same kind of electrodes together at the edge of the film. The voltage to the positive and negative electrodes can be connected via large resistances. The positive and negative charges can also be replaced with a so-called electret charge, which is injected into the dielectric film in a cyclic fashion with positive and negative charges alternating. The film of the invention can also be used for the measurement of sound or vibration, i.e. electric energy corresponding to the movement of the electrodes is induced in the Δ and -Δ electrodes.

The film element shown in Fig. 1a can be manufactured from a thin plastic film with a metal plating on either side, in which the electrodes K are etched by using a technique employed in the manufacture of circuit boards. After this, the film is bent into folds L of a height of e.g. 1 - 10 mm with a distance of 0.1 mm between them. In the structure presented in Fig. 2a, consisting of two films, electret charges are placed between the films. The bars K of the electrodes are spaced at larger intervals and the positive and negative potentials are placed between them (Fig. 2b and 2c). Fig. 4a and 4b present an embodiment of the invention in which two folded films 3 are placed crosswise, one of which is fed with a reference signal I via a variable-gain amplifier A and the measurement signal obtained from the other film, corresponding to the sound pressure, is fed into the input of the variable-gain amplifier in opposite phase. In addition to sound reproduction applications, this film element can be used as an active damping element when the control signal is set to zero. The element can be coated with protective layers 4, both of which may be e.g. thin films or one may be a thicker plate. It is possible to place several or at least two elements as shown in Fig. 3a on top of each other with protective layers 4 on the outermost surfaces. In Fig. 3b, the voltage to the positive and negative electrodes is connected via a large resistance R1. As for the elec-

trodes K, Fig. 3c corresponds to Fig. 2b.

The elements of the invention are very light and durable and have a large power capacity. The films 1,2 are preferably produced from plastic films containing flat gas bubbles because it has been established that such films retain their electret charge well and are as light as possible. A film of this type is presented in US patent specification 4654546. In sound source applications, the invention is especially advantageous because the film movement is transverse to the sound direction, which means that the mass inertial forces of the film do not produce a counter moment in the direction of the sound. In noise damping applications, the elements function in a multi-effect manner. The air flowing between the folds L causes a viscose damping, and so does the visco-elastic motion of the films.

By using resistive electrode layers, a phase shift can be created in the element and the directional pattern can be widened only horizontally. To produce different directional patterns, the elements may also have a curved shape (Fig. 4b).

The invention can also be utilized in many other applications designed to convert electric energy into mechanical motion or vibration, or conversely to convert mechanical motion or vibration into electric energy. In both cases, a very high efficiency is achieved.

Fig. 5 presents an application of the invention in which battens 7 are attached to each side of a wall 8 or plate and elements 5 and 6 are placed on the battens, the elements being electrically connected by conductors 9. A noise generates a change of charge in element 5. This is fed in opposite phase into element 6. If the wall has a passive damping of e.g. 20 dB and the elements have an efficiency of 10%, complete damping in both directions is achieved (Fig. 5b). The efficiency and damping of the elements can be adjusted

by varying the + and - voltages or by selecting a suitable electret potential so as to obtain an optimal efficiency and the best damping for each practical application. Also, the folding density can be varied.

It is also possible to include an inductance or some other type of passive component in the conductor 9 to adjust the frequency and phase shift characteristics between the elements 5, 6. Moreover, the resonance spaces between the battens 7 can be utilized (Fig. 5c).

A larger number of elements 5,6 can be used in an application, and the elements can be interconnected in various ways depending on the use. An active amplifier or filter circuit can also be used. Since the elements 5, 6 have a passive sound damping effect as well and may have a very high efficiency, it is not always necessary to use an intermediate passive damping layer.

Fig. 6 presents an embodiment of the invention in which every third fold L is connected to the output of a controlling amplifier A whereas every second fold is sound-producing and connected as a feedback signal to the amplifier A. Fig. 7 presents a corresponding circuit implemented using electret films. The charges are on the surface of the folds L, and the opposite sides are provided with porous protective plates 10. Fig. 8 shows a structure in which an electret film (folds L) with a continuous metal plating 11 on one side acts as an element both producing and measuring sound.

It is obvious to a person skilled in the art that different embodiments of the invention are not restricted to the examples described above, but that they may instead be varied within the scope of the following claims.

CLAIMS

1. Folded dielectric film element (3,5,6) functioning as an energy converter, consisting of at least one dielectric film (1,2) said film (1,2) being bent into folds (L) and provided with electrodes (K),

characterized in that the electrodes (K) are so arranged in the folds (L), different electrodes being placed in successive folds, that the strength of the electric field increases in one fold and decreases in the other.

2. Film element according to claim 1, characterized in that the electrodes (K) are so arranged in the folds (L) that the electrode layers in successive folds occur in the order: d.c. voltage electrode (+), a.c. voltage electrode (Δ), d.c. voltage electrode (-) and a.c. voltage electrode (-Δ) in opposite phase.

3. Film element according to claim 1, characterized in that electrodes (K) are so arranged in the folds (L) that the electrode layers in successive folds occur in the order: electret charge (+), a.c. voltage electrode (Δ), electret charge (-) and a.c. voltage electrode (-Δ) in opposite phase or zero.

4. Film element according to claim 1, characterized in that the film (1,2) provided with a charge (Q) is coated in successive folds with electrode layers such that an a.c. voltage electrode (Δ) and an electrode (-Δ) in opposite phase are placed on opposite sides of the folds.

5. Film element according to claim 1, characterized in that the element is coated wiht at least one protective layer (4).

6. Film element according to claim 5, characterized in that the protective layer is a porous protective plate (10).

7. Film element according to claim 1, characterized in that the film (1,2) is provided with a continuous metal plating on one side.

8. Film element according to claim 1, characterized in that the film (1,2) is a plastic film containing flat gas bubbles.

9. Film element according to claim 1, characterized in that, for the production or damping of sound, at least one of its folded film elements (L) is provided with feedback and has a sound producing component and a sound measuring component, said components having an electric connection or a variable-gain amplifier (A) between them.

10. Procedure for manufacturing a folded dielectric film element (3,5,6) functioning as an energy converter and consisting of at least one dielectric film (1,2), said film (1,2) being bent into folds (L) and provided with electrodes (K),

characterized in that

the electrodes (K) are arranged in the folds (L) by placing different electrodes in successive folds so that the strength of the electric field in adjacent folds increases in one fold and decreases in the other, and that

the folded element (3,5,6) is compressed into a tight pack, whereupon the element is stretched so that the folds (L) assume a curvature resembling a low-gradient letter S which keeps the folds (L) in a stable position when subject to the forces of the electric field.

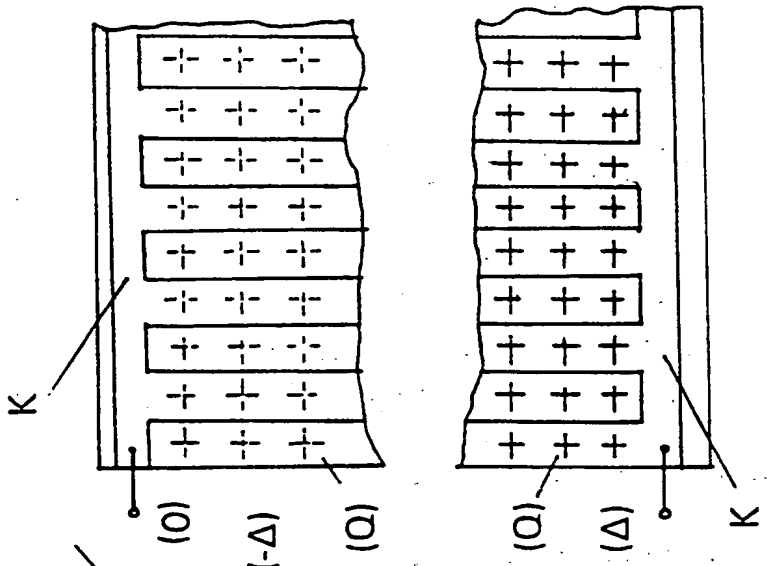

FIG.1B

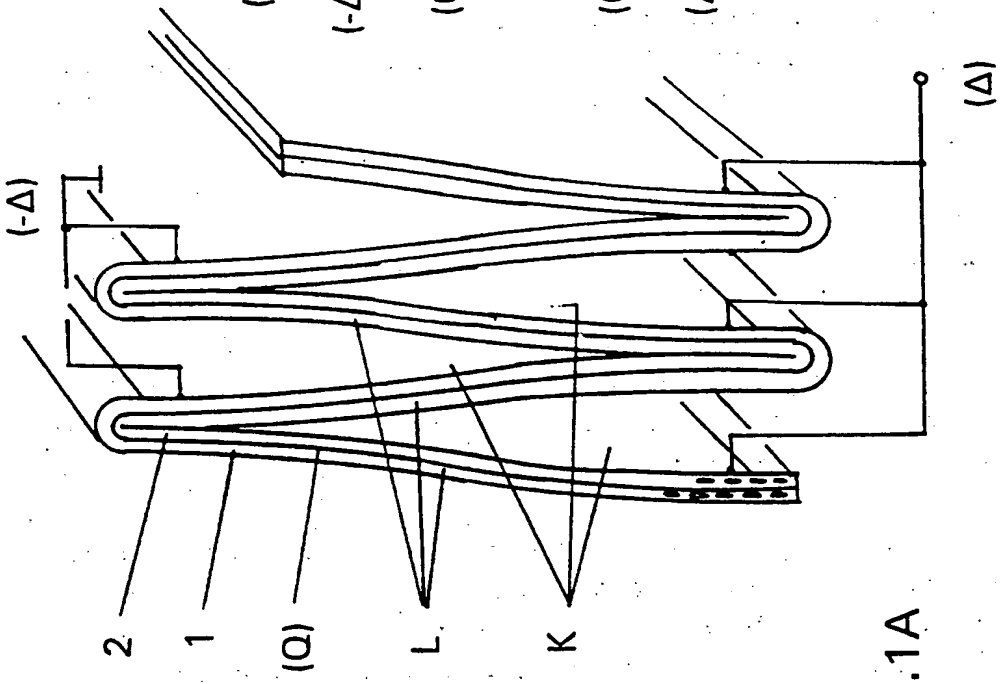

FIG.1A

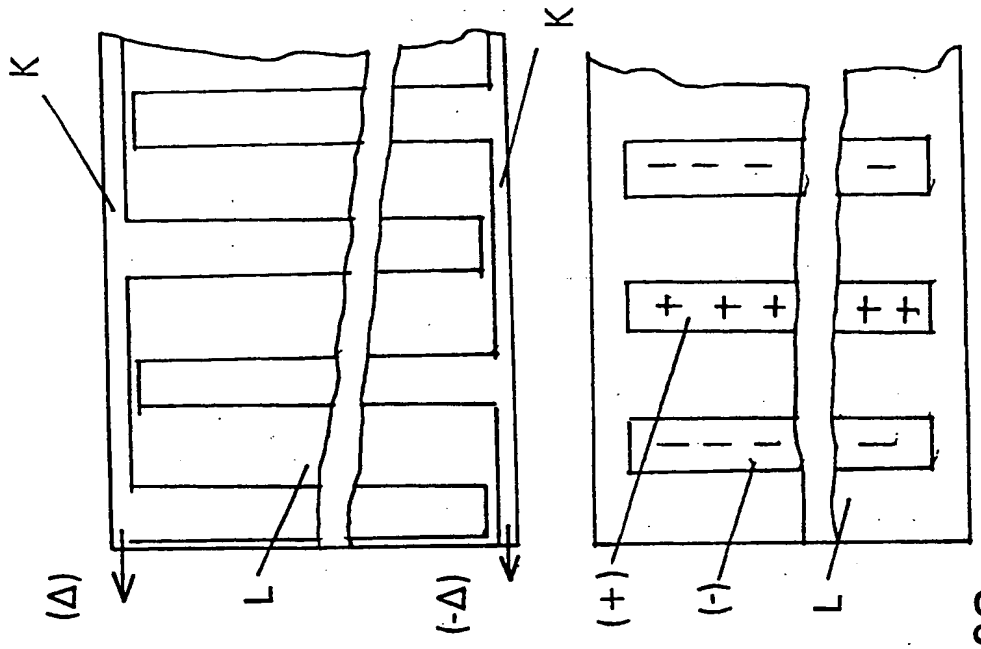

FIG.2B

FIG.2C

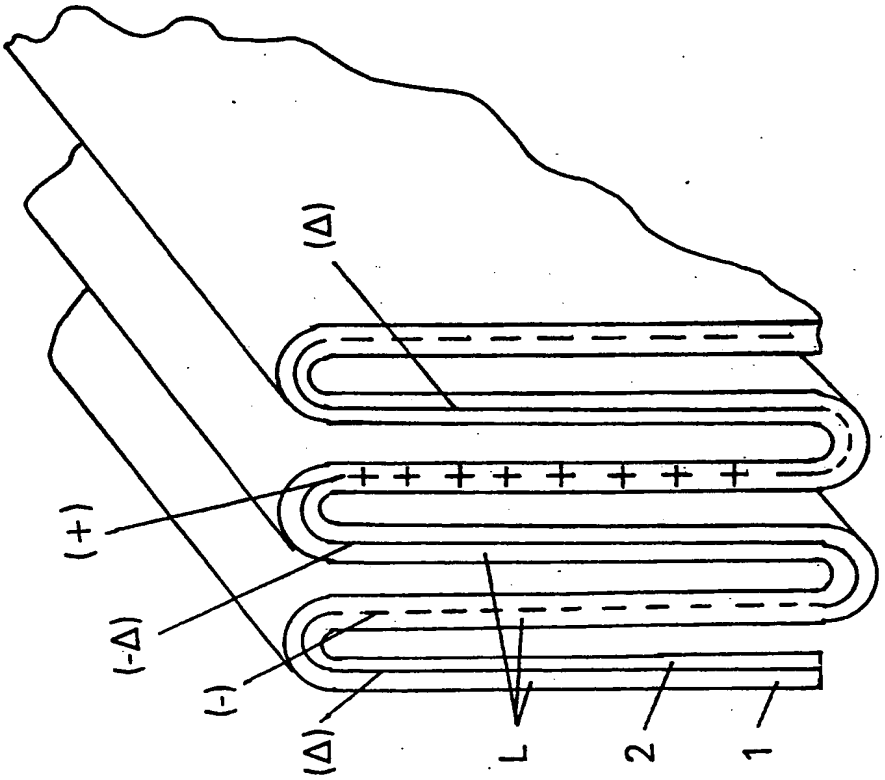

FIG.2A

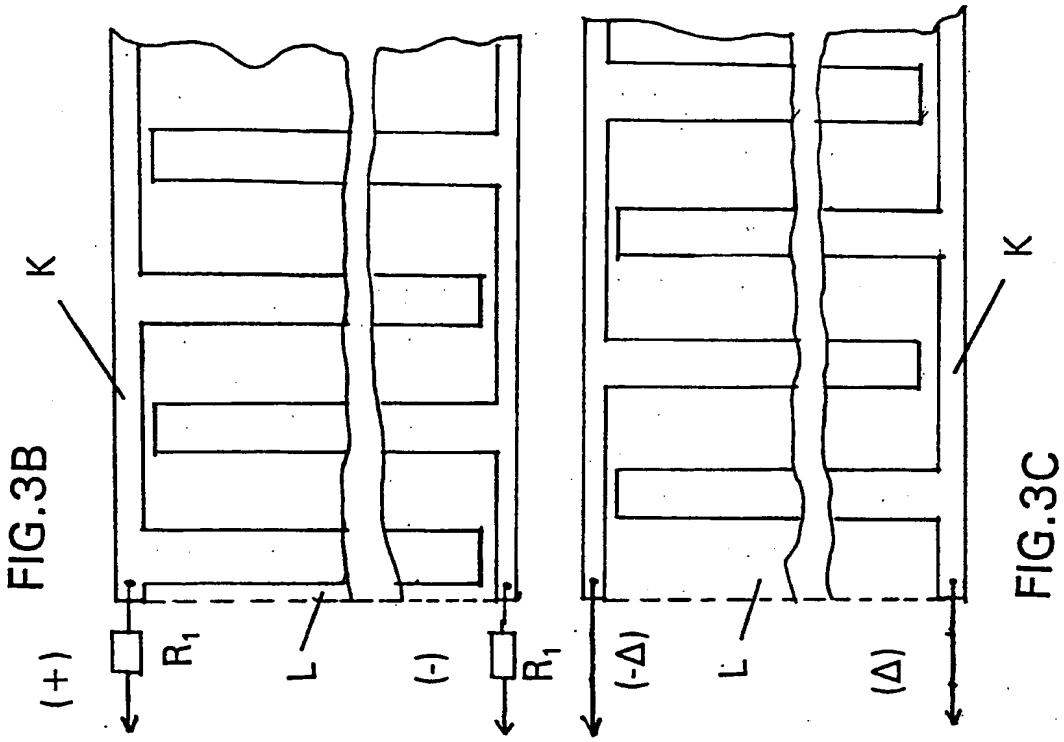

FIG.3B FIG.3C

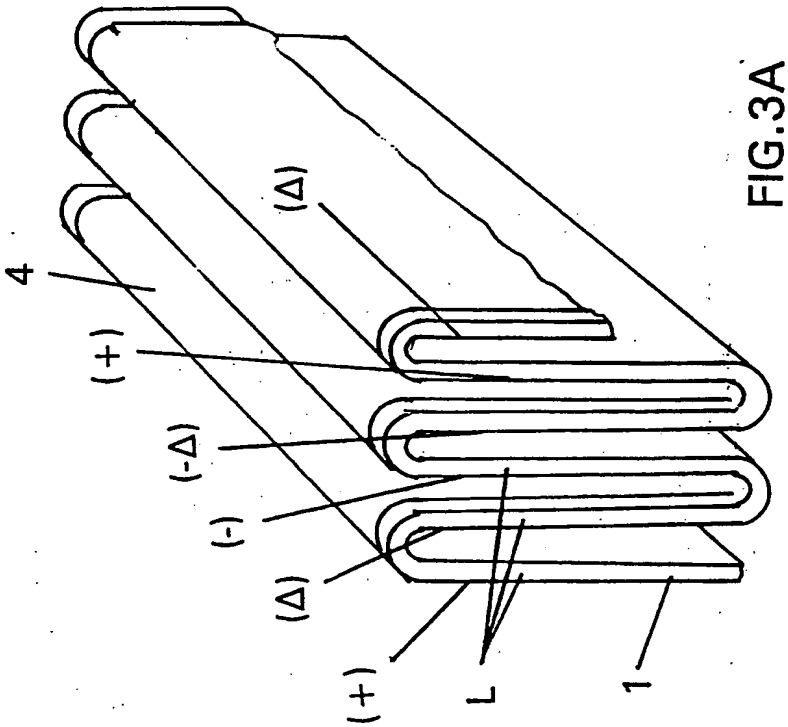

FIG.3A

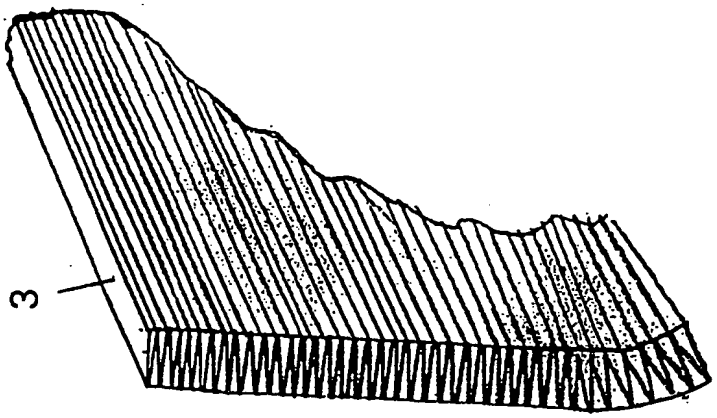

FIG.4B

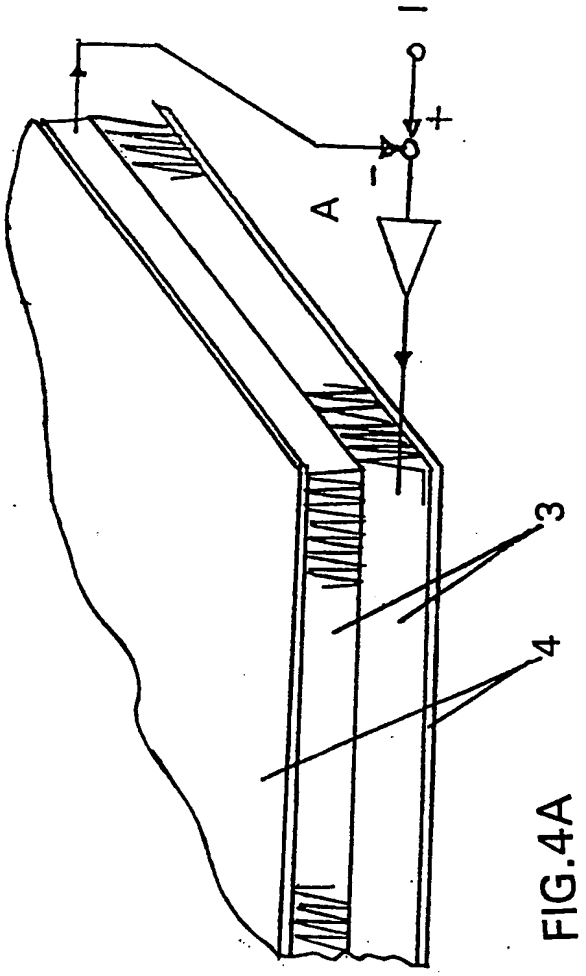

FIG.4A

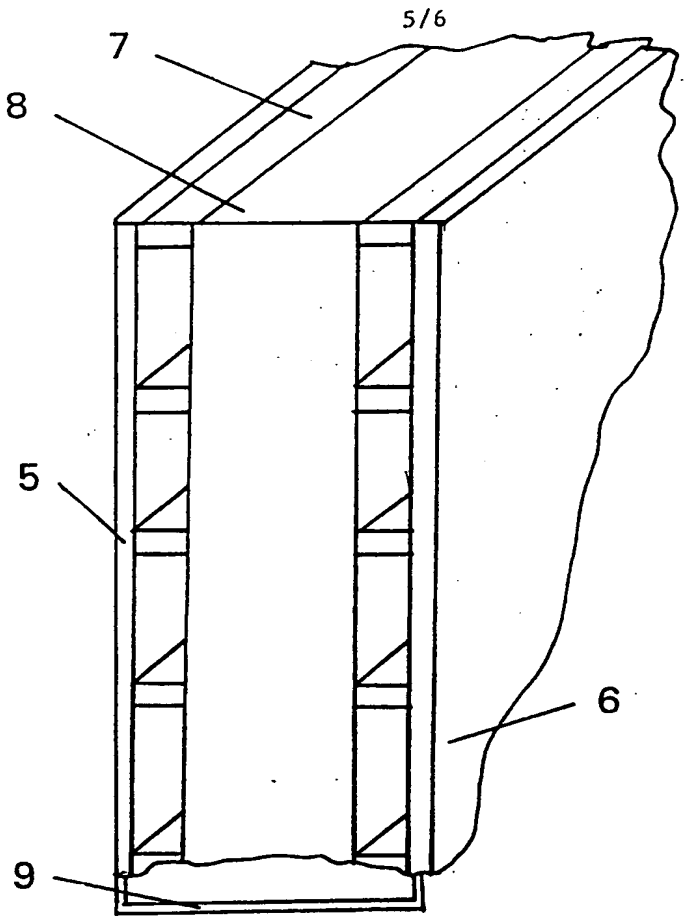

FIG.5A

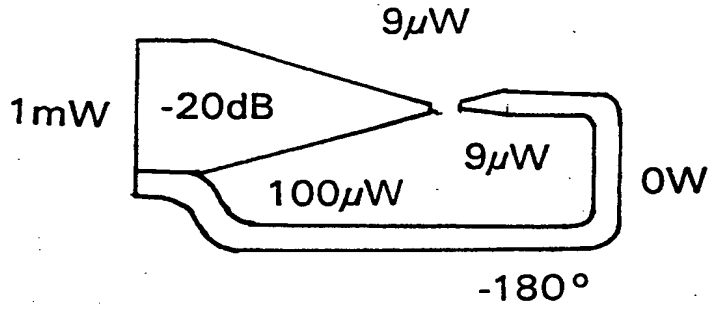

FIG.5B

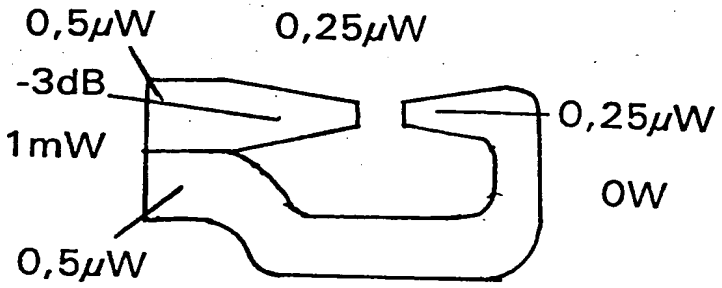

FIG.5C

SUBSTITUTE SHEET

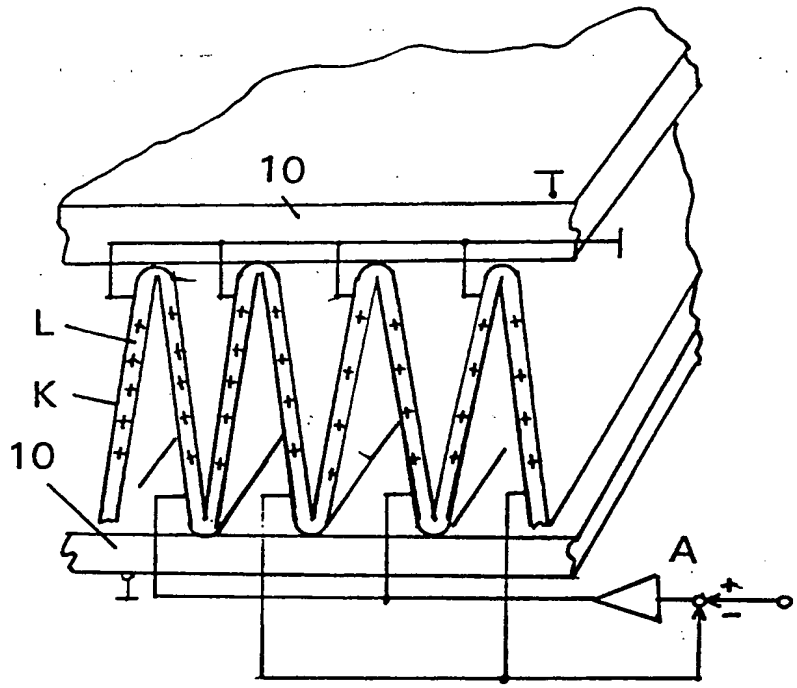

FIG.7

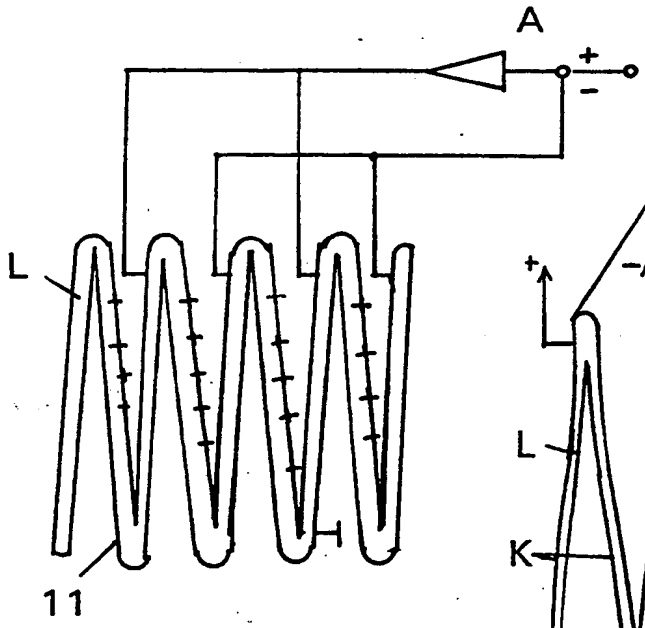

FIG.8

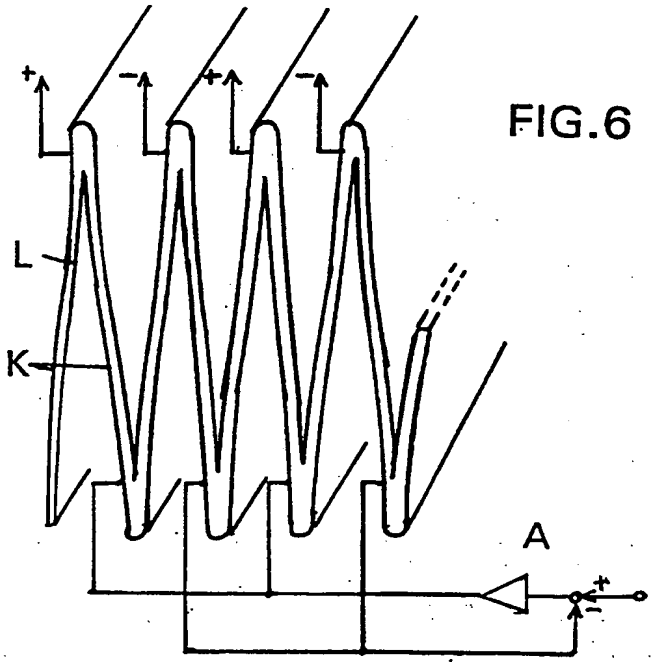

FIG.6

SUBSTITUTE SHEET

INTERNATIONAL SEARCH REPORT

Int...ional application No.
PCT/FI 94/00278

A. CLASSIFICATION OF SUBJECT MATTER

IPC[5] : H04R 19/00
According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC[5] : H04R, H01G

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

DIALOG 125, 340, 350, 351

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US, A, 2855467 (P. CURRY), 7 October 1958 (07.10.58), column 2, line 19 - column 4, line 7, figures 1,5,6-8 --	1-10
A	US, A, 3008014 (D.T.N. WILLIAMSON ET AL), 7 November 1961 (07.11.61), column 6, line 17 - line 30, figure 9 --	1-10
A	US, A, 4654546 (KARI KIRJAVAINEN), 31 March 1987 (31.03.87), column 1, line 5 - column 7, line 13, figures 1-7, abstract --	1-10

[X] Further documents are listed in the continuation of Box C. [X] See patent family annex.

* Special categories of cited documents:
"A" document defining the general state of the art which is not considered to be of particular relevance
"E" erlier document but published on or after the international filing date
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
"O" document referring to an oral disclosure, use, exhibition or other means
"P" document published prior to the international filing date but later than the priority date claimed
"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
7 October 1994	11 -10- 1994
Name and mailing address of the ISA/ Swedish Patent Office Box 5055, S-102 42 STOCKHOLM Facsimile No. +46 8 666 02 86	Authorized officer Roland Landström Telephone No. +46 8 782 25 00

Form PCT/ISA/210 (second sheet) (July 1992)

INTERNATIONAL SEARCH REPORT

International application No.
PCT/FI 94/00278

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	DE, A1, 2900611 (REICH, STEFAN), 17 July 1980 (17.07.80), page 4, line 1 - page 5, line 32, figure 1 --	1-10
A	GB, 212576 (HERMANN MEUSSER), 4 June 1925 (04.06.25), page 1, line 11 - page 2, line 78, figures 1-6 --	1-10
A	US, A, 4400634 (FRANCOIS MICHERON), 23 August 1983 (23.08.83), column 1, line 5 - column 7, line 22, figures 1-10, abstract --	1-10

INTERNATIONAL SEARCH REPORT

Information on patent family members

27/08/94

Inte...ional application No.
PCT/FI 94/00278

Patent document cited in search report	Publication date	Patent family member(s)		Publication date
US-A- 2855467	07/10/58	NONE		
US-A- 3008014	07/11/61	DE-B-	1088546	00/00/00
		DE-B-	1139548	00/00/00
		FR-E-	70574	00/00/00
		FR-A-	1134837	00/00/00
		GB-A-	815978	00/00/00
		US-A-	3008013	00/00/00
US-A- 4654546	31/03/87	EP-A,B-	0182764	28/05/86
		SE-T3-	0182764	
		JP-A-	61148044	05/07/86
DE-A1- 2900611	17/07/80	NONE		
GB- - 212576	04/06/25	FR-A-	578236	00/00/00
US-A- 4400634	23/08/83	DE-A-	3047834	17/09/81
		FR-A,B-	2472901	03/07/81
		JP-A-	56101788	14/08/81

Form PCT/ISA/210 (patent family annex) (July 1992)